


For use in human and veterinary medicine as well as in the NDT and security sector

Order No. AP6300

Portable, battery-powered X-ray unit **Amadeo P-100/35HB**

The battery-powered **Amadeo P-100/35HB** is one of the lightest, most compact and powerful high frequency X-ray units on the market. The portable X-ray systems of the **Amadeo** series are equipped with high-frequency generators, which generate up to 40 - 50 % higher output power compared to other generators. The ideal balance between performance and weight makes the **Amadeo P-100/35HB** the perfect solution for mobile radiography indoors and outdoors.

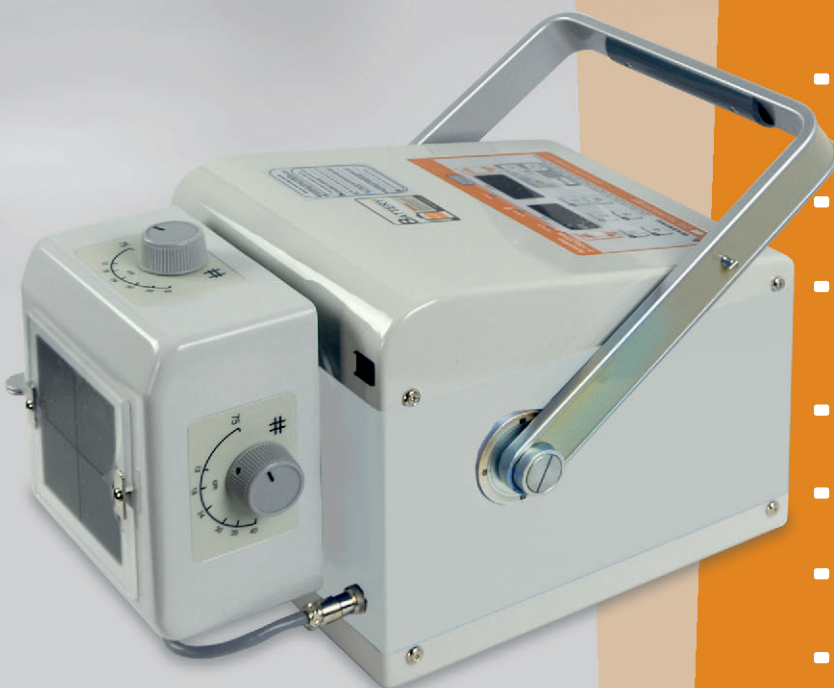

- CE declaration of conformity in accordance with Directive 93/42/EEC
- Automatic mains voltage compensation
- Collimator with high brightness and integrated timer
- Dual laser pointer
- Lithium polymer battery, charging time 180 minutes
- Dimensions 225 x 170 x 340 mm
- Weight 11.2 kg (including battery)

Portable, battery-powered X-ray unit **Amadeo P-100/35HB**

Scope of delivery

- X-ray unit **Amadeo P-100/35HB**
- 1 x battery and battery charger
- Aluminium carrying case
- 2-stage hand trigger

Short description

- Device can be powered by internal battery or external power supply
- Quality edge through high performance of the lithium-ion polymer batteries
- Up to 400 shots with only one battery charge
- Optimum protection against external shocks and dirt
- Equipped with remote control functions by hand switch

Technical Specifications

Construction	Monoblock X-ray unit, high frequency technology (full bridge inverter system)	
Output	Tube vol./current	100 kV / 35 mA
	Voltage range	40 - 100 kV in 1 kV steps
	mAs range	0,4 mAs - 100 mAs 35 steps
	Max. output	2,4 kW at 80 kV
X-ray Tube	Focal Spot	1,2 mm
	Heat storage	20 kHU
Collimator	Min. light field	5 cm x 5 cm @ 100 cm SID
	Max. light field	35 cm x 35 cm @ cm SID
	Lamp	LED
	Auto timer	30 sec
	SID scale lenght	built-in dual laser
Power	Input	110 / 220 VAC (Free-Voltage)
	Frequency/phase	50 / 60 Hz, single phase
	Voltage	±10 %
Weight	14,2 kg	
Dimensions	250 x 214 x 349 mm (W x H x L)	
Battery	Type	Li-polymer
	Capacity	4800 mAh
	Exposures	approx. 200
	Charging time	Less than 3 hours

Please visit www.or-technology.com
for more details

Specifications subject to revision without notice

The editor strives to impart correct and up to date information. The provided specifications are based on current knowledge and are subject to revision without notice. This brochure is subject to correction. The editor assumes no responsibility for the information being up to date, correct and complete. All furnished logos, pictures and graphics are property of the particular company and subject to copyright of the licensor. Use, dissemination, distribution or copying of the pictures, logos or text compiled or processed by the editor is subject to our written consent. All rights reserved.

