

Medici DR Dental System CMOS sental detector Pluto Size 1

High image quality & ease of use for your veterinary practice







CMOS dental detector Pluto Size 1

The Pluto Size 1 is a digital intraoral sensor and has a CMOS sensor with a resolution of 20 μ m. The sensor's CsI scintillator ensures optimal resolution. The sensor is an easy-to-use X-ray detector with cable and is dust and waterproof (comparable to IP68).

The Pluto Size 1 has an ergonomic design with smooth edges, rounded corners and a flexible cable for maximum patient comfort.

An easy-to-use high-speed USB interface allows easy connection to a PC without the need for an additional control unit.

- CMOS detector technology
- Low dose clinical imaging
- High resolution of 20 μ m
- Wide dynamic range
- Slim, rounded corners and smooth edges
- Direct USB connectivity
- AED trigger, quick and easy workflow
- Durable materials and components
- Effective Imaging Area: 20 mm x 30 mm

Parameter


Operating Humidity

Storage & Transport Humidity

Operating Atmospheric Pressure

Storage & Transport Atmospheric

Sensor	
Detector Technology	CMOS
Scintillator	Direectly deposited CsI:TI
Sensor size	38.5 mm x 25 mm x 5 mm
Effective Imaging Area	20 mm x 30 mm
Image Matrix	1500 x 1000 pixels
Pixel Pitch	20 µm
AD Conversion	16 bit
Spatial resolution	16 lp/mm
Ingress Protection	IP68 (the highest point of enclosures with a height greater than 1000mm below the surface of water, and the duration of the test is more than 30 minutes)
Sensitivity	>40 lsb/uGy
Trigger sensitivity	<100 uGy/s
Max linearity dose	>300 uGy
Length of cable	2.8m + - 50mm
Interface	USB 2.0
Power	<2W
Environmental	
Operating Temperature	10~35 °C
Storage & Transport Temperature	-10 to 55 °C

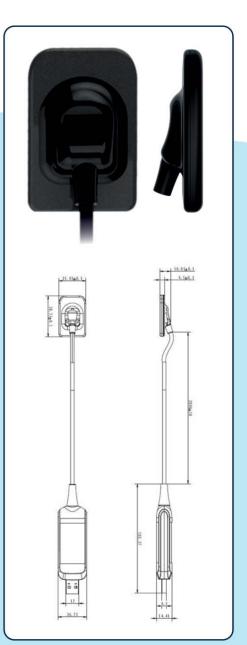

Specifications subject to revision without notice

The editor strives to impart correct and up to date information. The provided specifications are based on current knowledge and are subject to revision without notice. This brochure is subject to correction. The editor assumes no responsibility for the information being up to date, correct and complete. All furnished logos, pictures and graphics are property of the particular company and subject to copyright of the licensor. Use, dissemination, distribution or copying of the pictures, logos or text compiled or processed by the editor is subject to our written consent. All rights reserved.

Headquarters: OR Technology (Oehm und Rehbein GmbH), 18057 Rostock, Germany, Neptunallee 7c Info-Hotline: +49 381 36 600 600, info@or-technology.com, www.or-technology.com OR Technology UK: Celtic SMR Ltd., Frederick House, Hayston View, Johnston, Haverfordwest, Pembrokeshire SA62 3AQ, United Kingdom, www.celticsmr.co.uk, sales@celticsmr.co.uk

20~90% RH

10~95% RH

70 to 106 kPa

70 to 106 kPa

Info hotline: +49 381 36 600 600

www.or4vet.com